

A close-up photograph of industrial machinery, featuring a large gear on the left, a smaller gear on the right, and a chain running across the bottom. The background is a blurred blue, suggesting a factory or workshop environment. The lighting is dramatic, highlighting the metallic surfaces and the intricate details of the gears and chain.

RENOLD | Tooth Chain

Drive Technology

With Inverted Tooth Chains
from Renold



Fast. Precise. Silent. The inverted tooth chain's ability to transfer high loads in small spaces ensures that multiple drive applications are optimally implemented. The perfectly adjusted geometry of inverted tooth chain and sprocket engagement helps to minimize the intensity of chain link impact, thus illustrating the drive element's well-earned reputation of silent running.

Inverted tooth chain drives from Renold

Drive solutions full of power and precision:
precisely tailored to the application

Renold inverted tooth chains for drives

The variable construction of the inverted tooth chains makes any required chain width and length possible. Especially in tight spaces or with large shaft center distances, this allows for a solution optimized to the application and the actual load in question. In conjunction with the low impact typical for tooth chains, this drive solution is distinguished by extremely smooth, even, and precise running. The interlocking power transmission between the inverted tooth chain and the sprocket is slip-free, and no pre-tensioning is necessary.

- ➔ Space-saving and variable in type, design, and width
- ➔ Slip-free and silent
- ➔ Functional reliability and extended service-life
- ➔ Robustness, simple assembly/disassembly

Thanks to the use of premium materials and production processes, tooth chains can also be used in harsh ambient conditions, at high temperatures, or with aggressive chemicals. Substantially extended application life, minimized downtime – Renold chain drives assure cost-effective use.

Content

04 Renold inverted tooth chains for drives

- 04 Design, types of guides
- 06 Sprockets
- 07 Advantages

10 Product overview

- 12 HPC inverted tooth chain drives
- 14 Technical data HPC inverted tooth chain drives
- 16 Biflex inverted tooth chain drives
- 18 Technical data Biflex inverted tooth chain drives
- 20 Specific solutions
- 24 HDL/KH inverted tooth chain drives
- 26 Technical data HDL/KH inverted tooth chain drives


30 Calculate, order, assemble

34 Product development




Inverted tooth chain construction

The construction of a silent chain out of a plurality of individual plates implies many advantages

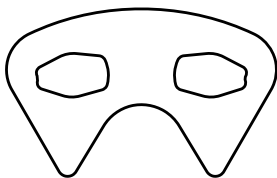

Toothed plate

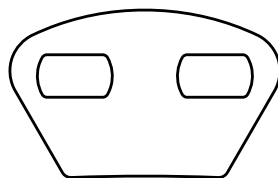

Guide plate

The inverted tooth chain is composed of:

- ➔ Toothed plates
- ➔ Guide plates
- ➔ Rolling pivot joint – consists of 2 profile pins
- ➔ Rivet washers

Inverted tooth chain construction

The inverted tooth chain is a cohesive network of sturdy links. Depending on the required length and width, it is made of a variety of link plates and profile pins. The result: a powerful and flexible chain drive that can be perfectly adapted to the specific task at hand. The image shows an HPC inverted tooth chain with a center guide. A chain is made up of a certain number of links which are also named pitches. The chain length—meaning the number of chain links—depends on the number of teeth on the sprocket and the shaft center distance.

Depending on the chain width, each link will have a certain number of link plates arranged in a staggered configuration from link to link. These links are connected to one another by the rolling pivot joint.

Force and motion are transmitted via the toothed plates. Each link plate is provided with two joint bores to accommodate the rolling pivot joint.

The rolling pivot joint is composed of two profile pins that are designed according to the chain type. Both pins are held captive within the plates. When a joint moves—as the chain enters and exits the sprocket—the two profile pins roll against each other. The remaining sliding friction is minimized.

Types of standard guides

Guide plates

Guide plates generally do not contribute to power transmission. Guide plates prevent the inverted tooth chain from drifting sideways on the sprockets. Special guide plates designed as reinforcement plates can be used in slow-running, high-performance drives suffering a limited amount of space. In addition to their guide functions, these link plates also contribute to power transmission. Please contact us if you would like more details on this option.

Center guide


The illustration of an inverted tooth chain with a center guide shows the guide plates located in the center. The wheel toothing also features a profiled guideway to support the guide plates. The lateral play within the groove corresponds to link plate thickness for standard sprockets.

Side guide

In the inverted tooth chain shown to the right, the guide plates are located on the outer sides of the chain. The side guide is particularly favored for narrow widths since the toothing is not weakened by the guideway. Here, the sprocket runs between the guide plates and the minimum play needs to be adjusted to the minimum thickness of the toothed link plate package.


Multiple center guide

Guide plates can also be arranged in several rows in an inverted tooth chain as a multiple guide, meaning the construction is either a multiple center guide or a combined center/side guide. These modifications are used to provide better support in drives with vertical shafts, for example. In this case, additional support flanges on the sprocket are not required.

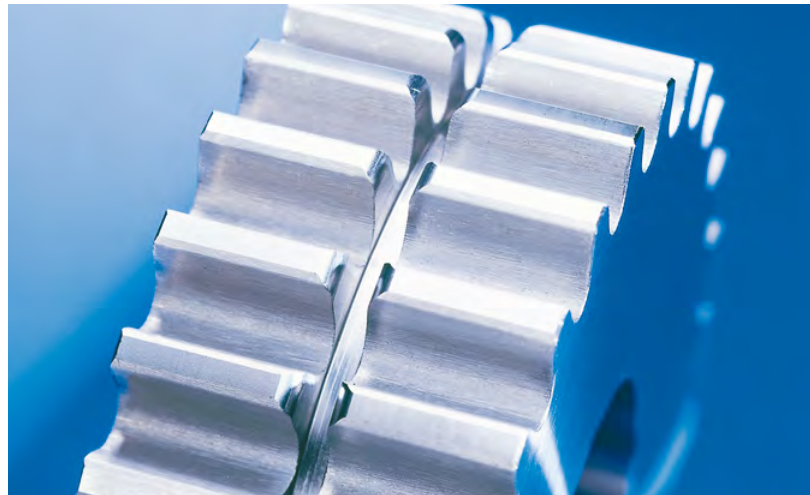


HPC sprocket with an center guide


Center guide



Side guide



Multiple center guide

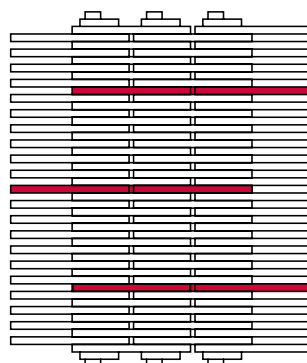

Drive chain with reinforcement plates, combination of center and side guide

Inverted tooth chains and sprockets

Chain and sprocket have to fit perfectly:
Rely on our know-how!



Properly machined sprockets are essential to the inverted tooth chain's safe operation and long service life. Using sprockets from other manufacturers invalidates the inverted tooth chain warranty.

No room for false teeth

The signature involute toothing guarantees the quietest running possible of the tooth chain drive. If quiet running is a priority, wheels with higher numbers of teeth are preferred for higher speeds. When determining the number of teeth, the outside space required – including the applied chain – and the permissible sprocket bore needs to be taken into account in addition to the minimum number of teeth for the respective type. The tip diameters specified in the tables on the relevant type pages apply to wrap drives only. Using inverted tooth chains without wrap requires specially-toothed wheels. Sprockets can be ordered ready for installation and manufactured according to the customer's specifications. Usually, C45 steel sprockets with hardened tooth flanks are used or cast-iron sprockets from GG or GGG. An uneven amount of teeth should be preferred especially for cast-iron sprockets. Other metallic and non-metallic materials are also possible. The wheel width depends on the inverted tooth chain width and guide type.

Special types

2-part sprockets can be delivered for later installation on through shafts. The toothing can be milled directly in a shaft.

Flanges or feed disks

The sprocket guideway is done away with on special inverted tooth chains lacking guide plates. The sprockets can be equipped with flanges on both sides to act as a lateral guide for the inverted tooth chain. Conditions are similar for drives with vertical shafts. A feed disk with an enlarged diameter is mounted at the bottom of the sprockets. The tooth chain is supported by the protruding ring surface and relieves the guide plates from the chain's weight.



Customer-specific sprocket manufacturing



The secret's in the technology

The many benefits of inverted tooth chain drives over other drive solutions are by design


Classic wrap operation? Counter-running drive shafts? Individual drive systems? With their special design, Renold inverted tooth chains offer a variety of unique product characteristics.

Runs like a whisper


The skillful reduction of chain link impact is one of the basic reasons behind the exemplary smooth running and lack of noise. The intensity of the impact is the result of the chain link mass and the speed of impact. The equivalent characteristic values of Renold inverted tooth chains are significantly lower than those of other drive types.

Noise levels compared to other drives


At 24 m/s

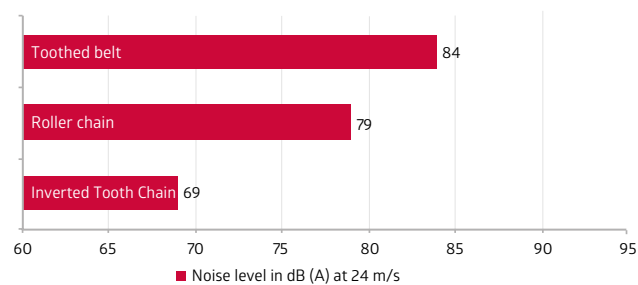


at 48 m/s

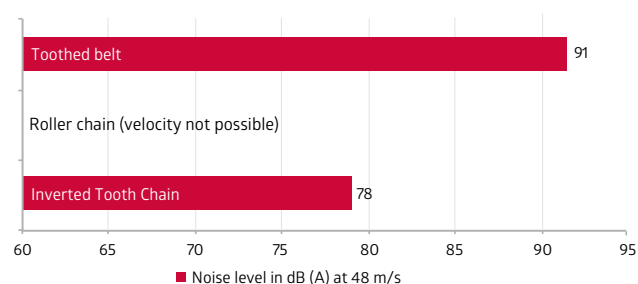

Inverted tooth chain

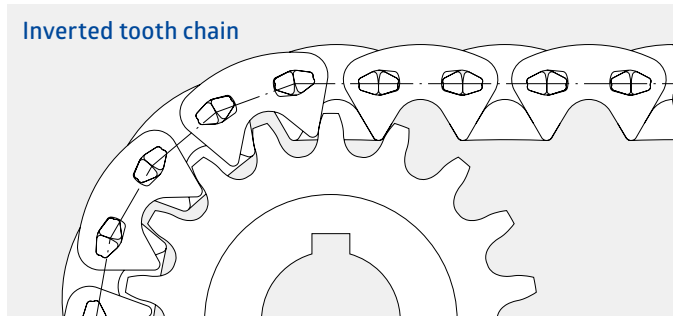

Roller chain

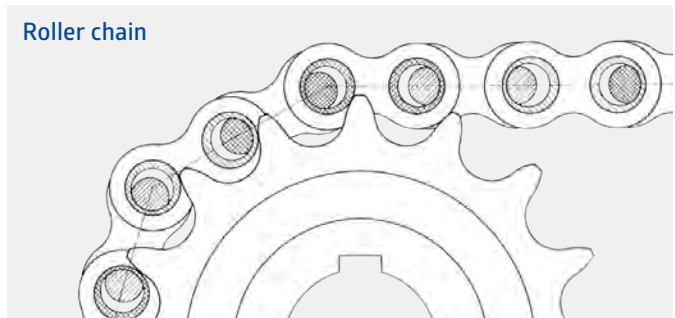

Engineering advantages compared to roller chains


The pictures reveal the fundamental difference of wear elongation during operation. Roller chains consist of outer and inner links which are subjected to varying wear and tear. Inner links experience a different degree of wear than outer links. Therefore outer links describe a larger pitch circle. This causes the chain to move jerkily and also places uneven stress on the sprocket teeth. At the same time, vibrations result in a noise level increase.

Advantages over toothed belts ...

Variable loads—where belts start to jump, the inverted tooth chain can hold court

Within their maximum carrying capacities, inverted tooth chains with a particular drive can transfer a variety of loads (torques, speeds) with the same quality. This applies especially to winder and universal spindle drives. Toothed belts can be optimally engaged only within a small load range since only the data from one operating point are used to determine the pre-tensioning. This leads to considerable problems in drives whose loads are frequently changing or whose use cannot be predicted by the customer. For most of the time – or even generally – the belt drive is either tensioned too little or too much and is thus subjected to stronger wear resulting from flank friction. This is particularly true in belt disks with reduced tooth flank backlash, the so-called zero-gap meshing.

Example: Winder velocity profile

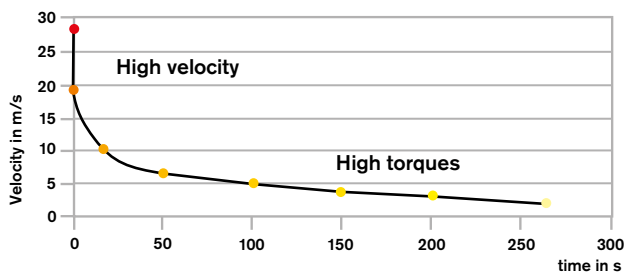


Even with varying loads, an inverted tooth chain is the optimum solution.

Using inverted tooth chains prevents the consequences of faulty belt tensioning:

- Danger of skipping
- Greatly reduced service life
- Higher temperatures resulting from friction
- Increased energy consumption
- Less efficiency
- Damage to permanently lubricated bearing and integrated measuring systems (among others)


Overlapping pre-tensioning and working load leads to higher belt loads, wider belts, and thus noise problems at higher speeds.

Static load

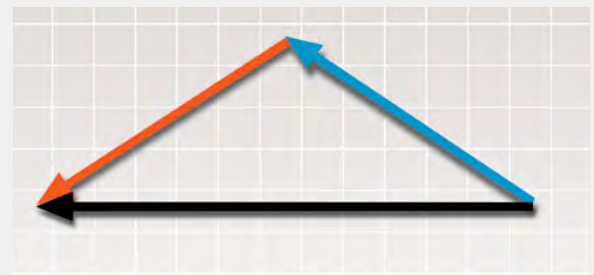

Static bearing load: Totalled initial pretension

Dynamic load

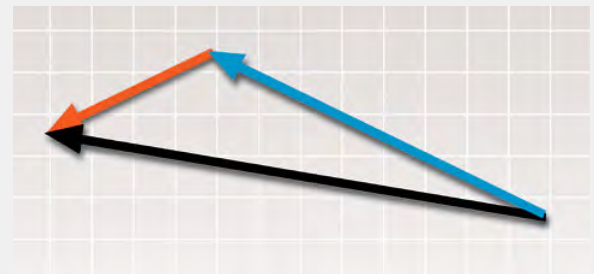

Dynamic bearing load: Totalled result of overlapping operating load and pretension

Pre-tensioning – do bearings really have to suffer?


Inverted tooth chains generally run without pre-tensioning, eliminating a large part of the bearing load. Toothed belt drives sometimes need to be pre-tensioned with more than the drive load component to ensure safe transmission of the operating load. This is true to an even greater extent for Poly V and flat belt drives. The pre-tensioning force is determined based on normal, dry conditions. Any reduction of the friction coefficient through ambient influences, for example, must also be compensated for on toothed belts by further increasing the pre-tensioning.

... and other drive solutions

Heating things up

Throughout many years of development work, Renold has consistently been able to substantially improve inverted tooth chain performance in high-temperature drive applications. In conjunction with the original Renold rolling pivot joint, even our standard drives can be continuously operated in ambient temperatures up to 120°C – and are thus clearly better than most other drive elements. Additionally, our HAT (High Ambient Temperature) inverted tooth chains and sprockets can be used with heat-resistant lubricants at temperatures of up to 200°C without any noticeable increase in wear.

Working temperature compared to other drives

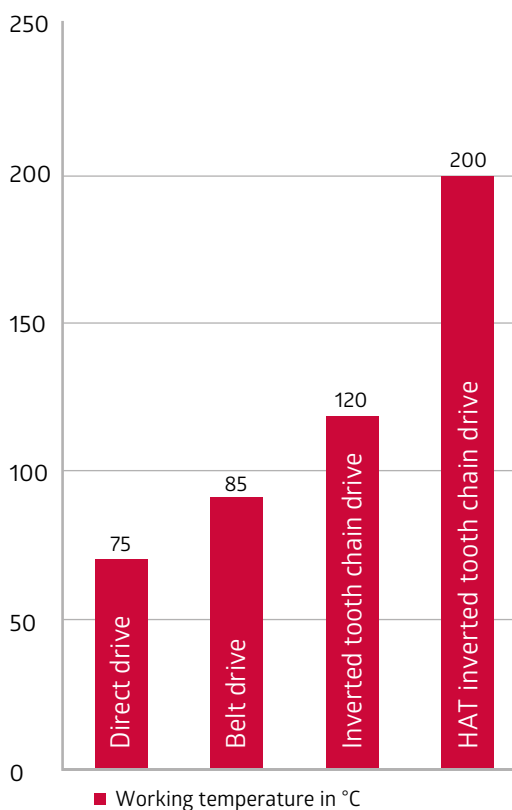

More assets at a glance: Advantages of Renold inverted tooth drive chains over ...

... belts

- More resistant to chemicals, especially when cooling lubricants are used
- Simple assembly thanks to the possibilities of pin locks associated with correspondingly short downtimes or the lack of extra construction
- Reduced sensitivity to temperatures > 85°C and extremes in humidity, e.g. material does not swell and the tensile member does not shrink when moisture is absorbed

... other steel pintle chains

- Very high maximum speed
- Low and uniform wear
- Low running noise
- Good meshing conditions
- Low wear even with standard sprockets
- Highly flexible width
- Smooth running, not susceptible to vibration
- High efficiency
- Consistent, high quality

... gear wheels/gear boxes

- Low cost for wide shaft center distances
- Meshing unaffected by fluctuations in temperature
- Quiet at every operating point
- Zero tooth flank backlash
- High tolerances for shaft arrangement
- Possible to combine rotatory and linear motion
- Good self-damping
- Highly efficient at every operating point
- Moderate costs for special solutions


Inverted tooth chains from Renold – the benchmark for wrap drives.

The different tooth chain types

One-sided, both-sided, all-round – Renold offers the right drive concept for every application

Renold – the art of optimization

Faster, stronger, quieter. Constant progress is the only way to reach this goal. The development of the very first inverted tooth chain to the original type HPC from Renold is the result of many years of effort put in by a motivated team of technicians and engineers. All to your advantage!

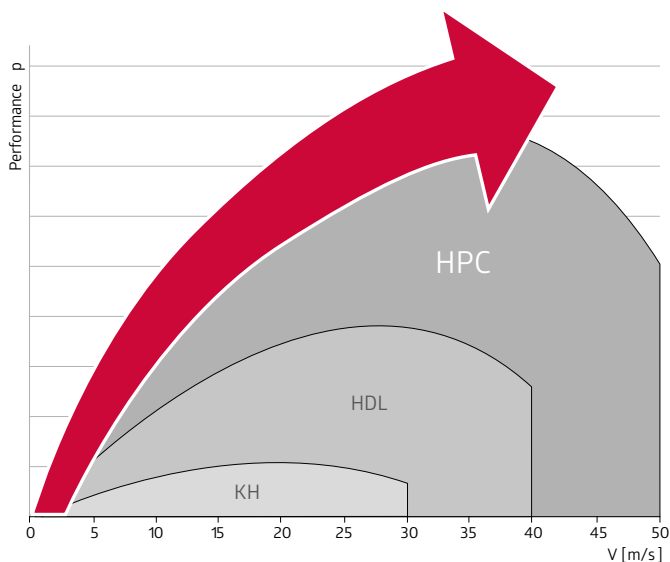

Biflex – flexible to both sides


Our invention. For performance and precision, fully symmetrical link plates provide equal drive on both sides and in both directions. Problems with counter-running shafts, S-shaped wraps, or space-saving tensioning methods can be eliminated with Renold inverted tooth drive chains.



Individual – ready to meet your requirements

The maximum flexibility of the inverted tooth chain drive system allows it to be adapted easily to the most diverse requirements. We can supply your application solution – from individual special link plates to complete specialized inverted tooth chains.





HPC


Type designation: HPC

Pages 12 – 15

Available pitches: 3/8", 1/2", 3/4", 1", 1 1/2"

Minimum number of teeth on the sprockets: 3/8" bis 3/4" 17 teeth
1", 1 1/2" 19 teeth
from 1 m/s ≥ 23 teeth

Max. velocity: up to 50 m/s



HDL


Type designation: HDL

Pages 24, 26 – 27

Available pitches: 3/8", 1/2", 3/4", 1"

Minimum number of teeth on the sprockets: 17 teeth
from 1 m/s 23 teeth

Max. velocity: up to 40 m/s



KH


Type designation: KH

Pages 25, 28 – 29

Available pitches: 5/16", 3/8", 1/2", 5/8", 3/4", 1",
1 1/2", 2", 2 1/2"

Minimum number of teeth on the sprockets: 5/16" bis 3/4" 13 teeth
from 1" 15 teeth

Max. velocity: 5/16" bis 3/4" up to 30 m/s
from 1" up to 25 m/s



Biflex


Type designation: BIZ

Pages 16 – 19

Available pitches: 3/8", 1/2", 3/4", 1"

Minimum number of teeth on the sprockets: 3/8", 1/2", 3/4" 18 teeth
1" 19 teeth
≥ 23 teeth preferred

Max. velocity: up to 40 m/s




Tradition meets innovation

Pages 20 – 23

Special chains of all types and pitches are individually adapted to the requirements specified. Using the latest technology and expertise acquired from over 100 years of experience, we are in the prime position to develop and produce a configuration perfect for your needs.

HPC inverted tooth chain drives

The original: the HPC inverted tooth chain from Renold – stronger, faster, quieter

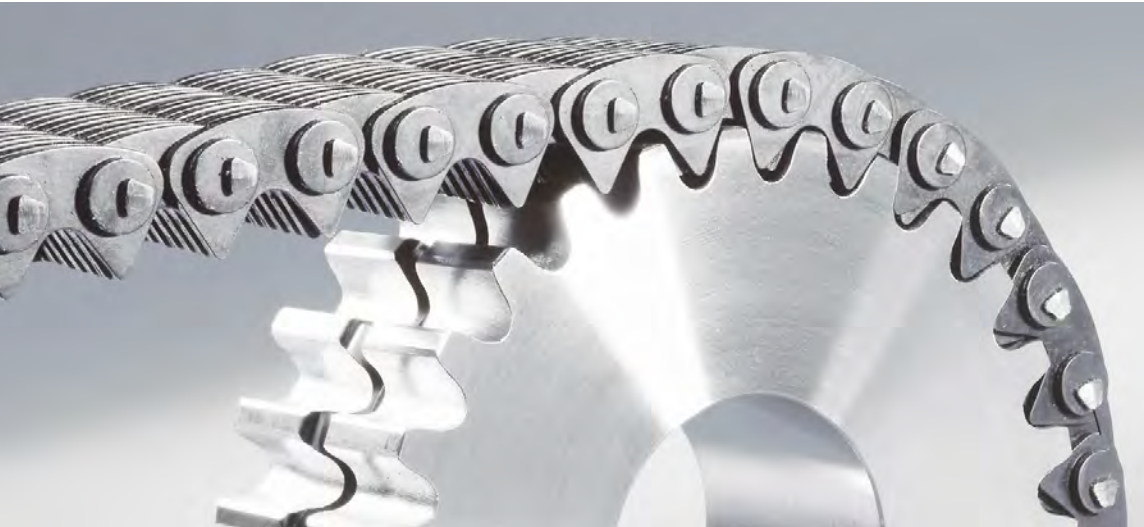

State of the art. The most powerful type of Renold inverted tooth chains sets new standards for wrap drives. Faster, quieter, and more precise than any other inverted tooth chain type before, the latest generation of inverted tooth drive chains with rolling pivot joint meets the highest demands.



The original: the HPC inverted tooth chain from Renold

Enhancements made to the proven HDL range unite the familiar and outstanding characteristics with new, extra advantages.


- Improved quiet running and low noise
- Low-friction rolling pivot joint with the optimum efficiency
- Higher load capacity and narrower inverted tooth chain width
- More resistant to wear and minimized elongation
- Inverted tooth chain velocities up to 50 m/s

Over 60% more powerful than before.


- ➔ Higher dynamic rigidity, apparent on the eye and back cross section reinforcements
- ➔ Wedge-shaped joint profiles ensure a play-free position in the link plate bore and prevent self-movement that increases wear
- ➔ Compact cross section increases the joint's resistance to shearing and bending

Optimized link plate form and joint kinematics


HPC

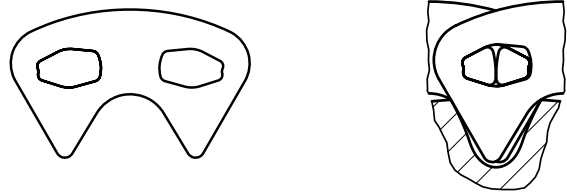

HDL

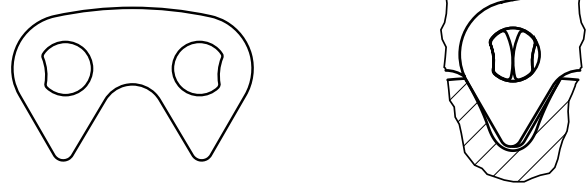

KH

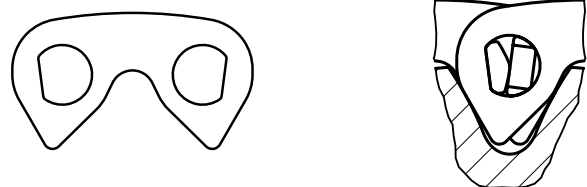

Power and Velocity:

Power:

$$P = \frac{M \cdot n}{9550}$$

Velocity:

$$v = \frac{Z \cdot p \cdot n}{60000} \leq 50 \text{ m/s}$$

- P = power in kW
- M = torque in Nm
- n = speed in r.p.m.
- v = velocity in m/s
- Z = number of teeth
- p = pitch in mm
- Note: Torque M and speed n must refer to the same sprocket with the number of teeth Z!

Design breaking load:

Design breaking load

step 1:

$$F_{\text{Berf}}^* \geq \frac{P \cdot k}{v} \cdot S_{\text{min}}$$

How to calculate the required design breaking load:

1. Initial calculation according to step 1
2. Select an inverted tooth chain from the table on page 14
3. Recalculate according to step 2 and select again if necessary

- F_{Berf} = design breaking load in kN
- P = power in kW
- k = impact factor according to table
- v = velocity in m/s
- G = inverted tooth chain weight in kg/m
- S_{min} = type/application-dependent safety coefficient HPC = 8...10
- The impact factor must be adjusted to the actual torque in case of maximum speed. In general, a value of k = 1 is sufficient, deviating from the start-up behavior.

Design breaking load


step 2:

$$F_{\text{Berf}} \geq \left(\frac{P \cdot k}{v} + G \cdot v^2 \cdot 10^{-3} \right) \cdot S_{\text{min}}$$

Design impact factor values

Load	Drive motors		
	Soft startup drive	Three-phase current motor	Piston motor
Even	1.0	1.2	1.5
Medium impacts	1.3	1.5	2.0
Heavy impacts	≥ 1.7	≥ 2.0	≥ 2.5

HPC inverted tooth chains

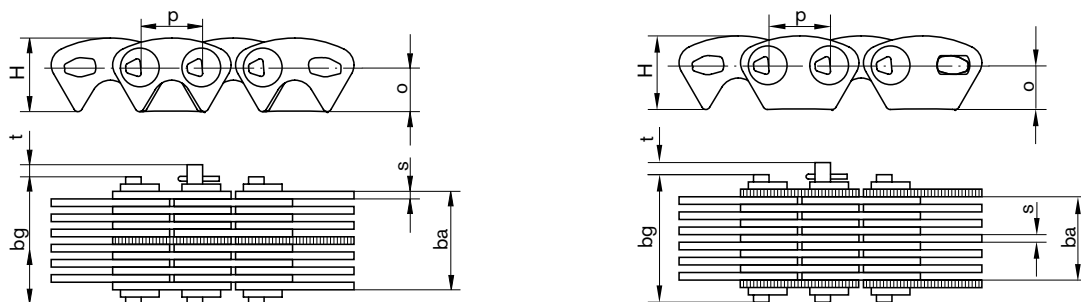


Pitch p	Designation no.	RZ	Nominal width b_n	Working width b_s	Total width b_g	Design breaking load	Weight [kg/m]	Sprocket width b	H	o	s	t
3/8" = 9.525 mm	HPC 015 A	10	15	12.5	19.9	25.4	1.0	11.5	11.3	6.8	1.5	2.0
	HPC 020 A	13	20	17.2	24.5	30.1	1.2	16.0				
	HPC 025	17	25	26.6	30.8	39.3	1.5	30.0				
	HPC 030	21	30	32.9	37.1	48.6	1.8	35.0				
	HPC 040	25	40	39.1	43.3	57.9	2.2	45.0				
	HPC 050	33	50	51.6	55.8	76.4	2.9	55.0				
	HPC 065	41	65	64.2	68.4	94.9	3.6	70.0				
1/2" = 12.7 mm	HPC 320 A	13	20	17.2	26.3	34.1	1.6	16.0	15.2	9.0	1.5	2.5
	HPC 325	17	25	26.6	32.6	52.7	2.0	30.0				
	HPC 330	21	30	32.9	38.9	65.1	2.4	35.0				
	HPC 350	33	50	51.6	57.6	102.3	3.8	55.0				
	HPC 375	49	75	76.7	82.7	152.0	5.6	80.0				
	HPC 3100	65	100	101.7	107.7	201.6	7.5	105.0				
	HPC 3125	81	125	126.8	132.8	251.3	9.3	130.0				
3/4" = 19.05 mm	HPC 525	13	25	27.0	34.0	80.1	3.0	30.0	22.5	13.5	2.0	3.5
	HPC 540	21	40	43.7	50.7	129.4	4.9	50.0				
	HPC 550	25	50	52.0	59.0	154.0	5.8	55.0				
	HPC 585	41	85	85.3	92.3	252.6	9.5	90.0				
	HPC 5100	49	100	101.9	108.9	301.9	11.4	105.0				
	HPC 5125	61	125	126.9	133.9	375.9	14.1	130.0				
	HPC 5150	73	150	151.8	158.8	449.8	16.9	155.0				
	HPC 5200	97	200	201.8	208.8	597.7	22.5	205.0				
1" = 25.4 mm	HPC 640	13	40	40.2	48.2	152.4	6.0	45.0	30.0	18.0	3.0	4.0
	HPC 650	17	50	52.6	60.6	199.4	7.9	55.0				
	HPC 665	21	65	65.0	73.0	246.3	9.7	70.0				
	HPC 675	25	75	77.4	85.4	293.2	11.6	80.0				
	HPC 6100	33	100	102.1	110.1	387.0	15.3	105.0				
	HPC 6125	41	125	126.9	134.9	480.9	19.0	130.0				
	HPC 6150	49	150	151.7	159.7	574.7	22.7	155.0				
	HPC 6200	65	200	201.2	209.2	762.4	30.1	205.0				
1 1/2" = 38.1 mm	HPC 850	17	50	52.8	64.8	303.4	11.8	60.0	45.0	27.0	3.0	6.0
	HPC 865	21	65	65.2	77.2	374.8	14.6	75.0				
	HPC 875	25	75	77.6	89.6	446.2	17.4	85.0				
	HPC 8100	33	100	102.5	114.5	589.0	22.9	110.0				
	HPC 8125	41	125	127.3	139.3	731.8	28.5	135.0				
	HPC 8150	49	150	152.1	164.1	874.6	34.1	160.0				
	HPC 8200	65	200	201.8	213.8	1160.2	45.2	210.0				

Dimensions in mm – Design breaking load in kN – RZ (Number of rows) = number of all link plates per joint – Other pitches and widths on request.

- HPC inverted tooth chains are delivered open and with a split pin lock if not specified otherwise.
- Revolving chains require an even number of links. Chains with an uneven number of links could not be closed.
- Uneven numbers of links are permitted only if the ends of the chain are connected to external parts.

HPC inverted tooth sprockets

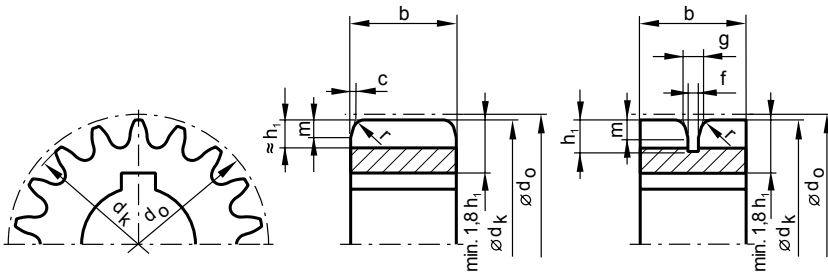

Minimum number of teeth:
 3/8" to 3/4" = 17 teeth
 1", 1 1/2" = 19 teeth
 from 1 m/s ≈ = 23 teeth

Tip diameter d _k					
Number of teeth z	3/8"	1/2"	3/4"	1"	1 1/2"
17	46.3	61.5	92.7	-	-
18	49.5	65.7	98.9	-	-
19	52.6	69.9	105.1	139.8	210.4
20	55.7	74.0	111.4	148.1	222.8
21	58.8	78.2	117.6	156.4	235.2
22	61.9	82.3	123.8	164.6	247.5
23	65.0	86.4	129.9	172.8	259.9
24	68.1	90.5	136.1	181.1	272.2
25	71.1	94.7	142.3	189.3	284.5
26	74.2	98.8	148.4	197.5	296.8
27	77.3	102.9	154.6	205.7	309.0
28	80.4	107.0	160.7	213.8	321.3
29	83.4	111.1	166.8	222.0	333.6
30	86.5	115.1	173.0	230.2	345.8
31	89.6	119.2	179.1	238.4	358.1
33	95.7	127.4	191.3	254.7	382.5
35	101.8	135.6	203.6	271.0	407.0
37	107.9	143.7	215.8	287.3	431.4
39	114.0	151.9	228.0	303.5	455.8
41	120.1	160.0	240.2	319.8	480.2
43	126.2	168.1	252.4	336.0	504.5
45	132.3	176.2	264.6	352.3	528.9
47	138.4	184.4	276.8	368.5	553.2
49	144.5	192.5	288.9	384.8	577.6
51	150.6	200.6	301.1	401.0	601.9
55	162.7	216.8	325.5	433.4	650.6
60	177.9	237.1	355.9	474.0	711.4
70	208.3	277.6	416.6	555.0	832.9
80	238.7	318.1	477.4	636.0	954.4
90	269.1	358.6	538.1	716.9	1075.8
100	299.4	399.1	598.8	797.9	1197.2
110	329.8	439.6	659.5	878.8	1318.6
120	360.1	480.0	720.2	959.7	1439.9
130	390.4	520.5	780.9	1040.6	1561.3
140	420.8	560.9	841.5	1121.5	1682.6
150	451.1	601.4	902.2	1202.4	1803.9

Guideway and profile					
Pitch p	3/8"	1/2"	3/4"	1"	1 1/2"
g	4.0	4.0	5.0	8.0	9.0
f	3.0	3.0	4.0	6.0	6.0
h ₁	5.5	7.0	11.0	14.0	22.0
m	4.0	5.0	8.0	9.0	16.0
r	2.0	2.0	3.0	3.0	4.0
c	0.5	0.5	0.5	1.0	1.5

The pitch circle diameter helps determine the correct external diameter of the sprocket with an attached chain in new condition.

Pitch circle diameter:


$$d_0 = \frac{p}{\sin(180^\circ/z)}$$

Max. diameter incl. chain

$$D_{max} = d_0 + 2 \cdot (H-o)$$

Biflex inverted tooth chain drives

More freedom with Biflex inverted tooth chains:
flexible to both sides

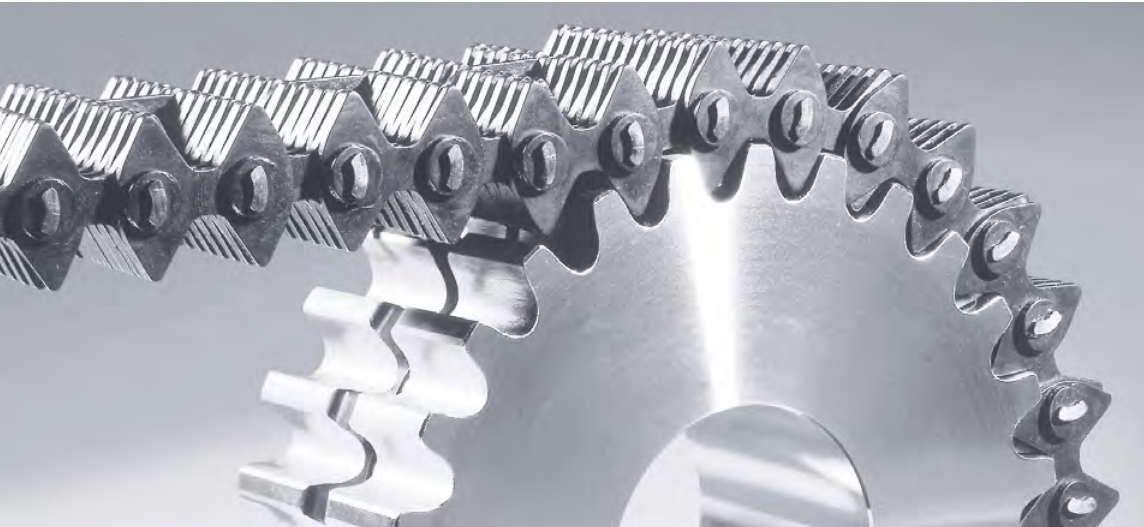

The highest flexibility possible – symmetrically toothed link plates on both sides yield equal performance and precision during bilateral use. It's the ideal solution for changes in direction of rotation or for multi-shaft drives.




More freedom with Biflex inverted tooth chains

Biflex link plates are completely symmetrical and provide full interlocking with the sprockets on both sides.

- As a drive for counter-running shafts
- As a drive for any number of shafts using an S-shaped wrap
- As an alternative to tensioning the inverted tooth chain when space is tight – idler sprockets can mesh on both sides
- As a drive along the lines of the pin wheel principle with tangential engagement

A balanced combination

- ➔ Uses the same joint profile as the HDL model
- ➔ Pivot pins are arranged symmetrically. These move to the center in tensioned chains, thereby permitting the same amount of bending in each direction
- ➔ Joints experience longitudinal play in straight position, i.e., the chain links can be pushed together slightly. This play is essential for the function, but the compression effect does not appear in practice due to missing pressure forces

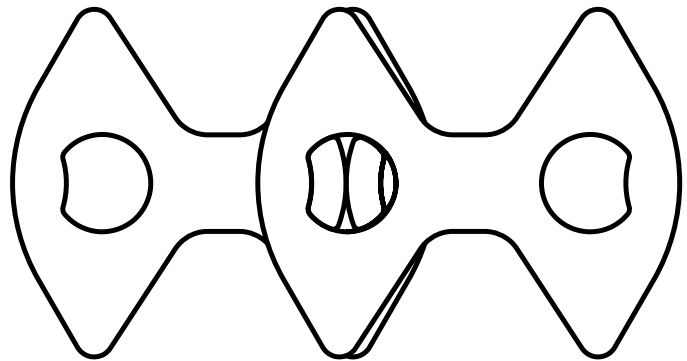

Power and velocity

Power:

$$P = \frac{M \cdot n}{9550}$$

Velocity:

$$v = \frac{Z \cdot p \cdot n}{60000} \leq 40 \text{ m/s}$$

P = power in kW p = pitch in mm
 M = torque in Nm Note: Torque M and speed n must refer to the same sprocket with the number of teeth Z!
 n = speed in r.p.m.
 v = velocity in m/s
 Z = number of teeth

This chain connects the advantages of the well-established HDL technology with equivalent properties for both sides and directions. This also results in the same design breaking load as with the HPC type.

Design breaking load:

Design breaking load step 1:

$$F_{\text{Berf}}^* \geq \frac{P \cdot k}{v} \cdot S_{\text{min}}$$

How to calculate the required design breaking load:

1. Initial calculation according to step 1.
2. Select an inverted tooth chain from the table on page 18.
3. Recalculate according to step 2 and select again if necessary.

F_{Berf} = design breaking load in kN
 P = power in kW
 k = impact factor according to table
 v = velocity in m/s
 G = inverted tooth chain weight in kg/m
 S_{min} = type/application-dependent safety coefficient Biflex = 8...10

The impact factor must be adjusted to the actual torque in case of maximum speed. In general, a value of k = 1 is sufficient, deviating from the start-up behavior.


Design breaking load step 2:

$$F_{\text{Berf}} \geq \left(\frac{P \cdot k}{v} + G \cdot v^2 \cdot 10^{-3} \right) \cdot S_{\text{min}}$$

Design impact factor values

Load	Drive motors		
	Soft startup drive	Three-phase current motor	Piston motor
Even	1.0	1.2	1.5
Medium impacts	1.3	1.5	2.0
Heavy impacts	≥ 1.7	≥ 2.0	≥ 2.5

Biflex inverted tooth chains

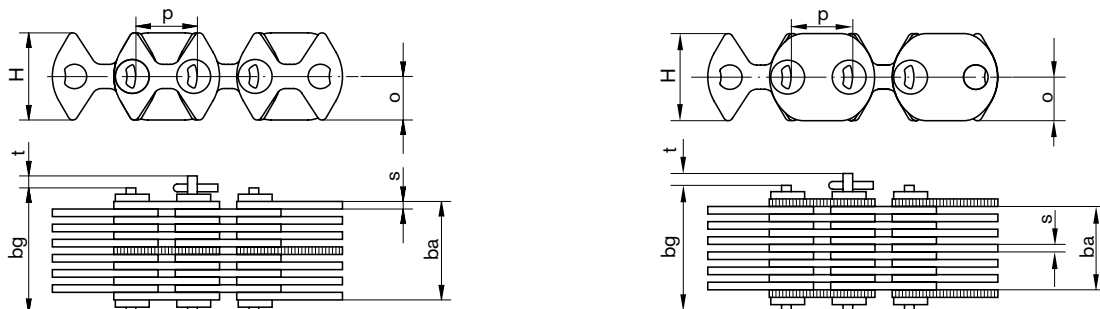


Pitch p	Designation no.	RZ	Nominal width b_n	Working width b_s	Total-width b_g	Design breaking load	Weight [kg/m]	Sprocket width b	H	o	s	t
3/8" = 9.525 mm	BIZ 015 A	10	15	12.5	19.9	16.4	0.9	11.5	14.0	7.0	1.5	2.0
	BIZ 020 A	13	20	17.2	24.5	20.1	1.2	16.0				
	BIZ 025	17	25	26.6	30.8	31.0	1.4	30.0				
	BIZ 030	21	30	32.9	37.1	38.3	1.8	35.0				
	BIZ 040	25	40	39.1	43.3	45.6	2.1	45.0				
	BIZ 050	33	50	51.6	55.8	60.3	2.8	55.0				
	BIZ 065	41	65	64.2	68.4	74.9	3.5	70.0				
1/2" = 12.7 mm	BIZ 315 A	10	15	12.5	21.3	27.9	1.2	11.5	18.0	9.0	1.5	2.5
	BIZ 320 A	13	20	17.2	25.9	34.1	1.6	16.0				
	BIZ 325	17	25	26.6	32.2	52.7	1.9	30.0				
	BIZ 330	21	30	32.9	38.5	65.1	2.4	35.0				
	BIZ 340	25	40	39.1	44.7	77.5	2.8	45.0				
	BIZ 350	33	50	51.6	57.2	102.3	3.7	55.0				
	BIZ 365	41	65	64.2	69.8	127.2	4.6	70.0				
	BIZ 375	49	75	76.7	82.3	152.0	5.5	80.0				
	BIZ 380	53	80	82.9	88.5	164.4	5.9	85.0				
	BIZ 3100	65	100	101.7	107.3	201.6	7.3	105.0				
	BIZ 3125	81	125	126.8	132.4	251.3	9.1	130.0				
BIZ 3150	97	150	151.8	157.4	300.9	10.9	155.0					
3/4" = 19.05 mm	BIZ 530 A	15	30	27.0	38.2	77.3	3.5	26.0	27.0	13.5	2.0	3.5
	BIZ 535	17	35	35.4	42.4	101.1	3.8	40.0				
	BIZ 550	25	50	52.0	59.0	148.7	5.6	55.0				
	BIZ 565	33	65	68.6	75.6	196.3	7.4	75.0				
	BIZ 585	41	85	85.3	92.3	243.9	9.2	90.0				
	BIZ 590	45	90	93.6	100.6	267.7	10.1	100.0				
	BIZ 5100	49	100	101.9	108.9	291.5	11.0	105.0				
	BIZ 5125	61	125	126.9	133.9	362.9	13.7	130.0				
	BIZ 5135	65	135	135.2	142.2	386.7	14.6	140.0				
	BIZ 5150	73	150	151.8	158.8	434.3	16.4	155.0				
	BIZ 5200	97	200	201.8	208.8	577.1	21.8	205.0				
1" = 25.4 mm	BIZ 640	13	40	40.2	48.2	151.9	5.8	45.0	36.0	18.0	3.0	
	BIZ 650	17	50	52.6	60.6	198.6	7.6	55.0				
	BIZ 665	21	65	65.0	73.0	245.4	9.4	70.0				
	BIZ 675	25	75	77.4	85.4	292.1	11.2	80.0				
	BIZ 6100	33	100	102.1	110.1	385.6	14.8	105.0				
	BIZ 6125	41	125	126.9	134.9	479.1	18.4	130.0				
	BIZ 6150	49	150	151.7	159.7	572.6	22.0	155.0				
	BIZ 6200	65	200	201.2	209.2	759.6	29.2	205.0				

Dimensions in mm – Design breaking load in kN – RZ (Number of rows) = number of all link plates per joint – Other pitches and widths on request.

- Biflex inverted tooth chains are delivered open and with a split pin lock if not specified otherwise. ■ Revolving chains require an even number of links. Chains with an uneven number of links could not be closed. ■ Uneven numbers of links are permitted only if the ends of the chain are connected to external parts.

Biflex inverted tooth sprockets

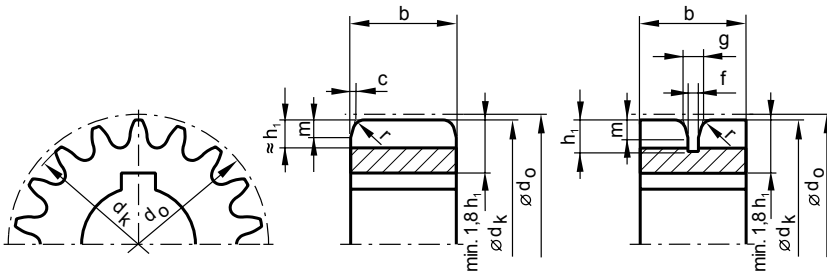

Minimum number of teeth:
 3/8", 1/2", 3/4" = 18 teeth
 1" = 19 teeth
 Z ≥ 23 is preferred.

Use smaller numbers of teeth only on sprockets which transfer torque at velocities up to v = 1 m/s.

Tip diameter d _k				
Number of teeth z	3/8"	1/2"	3/4"	1"
18	49.0	65.3	98.3	-
19	52.1	69.5	104.5	139.4
20	55.2	73.6	110.7	147.6
21	58.3	77.7	116.9	155.8
22	61.4	81.8	123.0	164.0
23	64.5	85.9	129.2	172.2
24	67.5	90.0	135.3	180.4
25	70.6	94.1	141.5	188.6
26	73.7	98.2	147.6	196.8
27	76.7	102.3	153.7	204.9
28	79.8	106.4	159.8	213.1
29	82.9	110.5	166.0	221.3
30	85.9	114.6	172.1	229.4
31	89.0	118.7	178.2	237.6
33	95.1	126.8	190.4	253.6
35	101.2	134.9	202.6	270.1
37	107.3	143.1	214.8	286.4
39	113.4	151.2	227.0	302.6
41	119.5	159.3	239.2	318.9
43	125.6	167.5	251.3	335.1
45	131.7	175.6	263.5	351.3
47	137.8	183.7	275.7	367.6
49	143.9	191.8	287.8	383.8
51	149.9	199.9	300.0	400.0
55	162.1	216.1	324.3	432.4
60	177.3	236.4	354.7	472.9
70	207.7	276.9	415.4	553.9
80	238.0	317.4	476.2	634.9
90	268.4	357.9	536.9	715.8
100	298.7	398.3	597.5	796.7
110	329.1	438.8	658.2	877.6
120	359.4	479.2	718.9	958.5
130	389.8	519.7	779.6	1039.4
140	420.1	560.1	840.2	1120.3
150	450.4	600.6	900.9	1201.2

Guideway and profile				
Pitch p	3/8"	1/2"	3/4"	1"
g	4.0	4.0	5.0	8.0
f	3.0	3.0	4.0	6.0
h ₁	5.5	7.0	11.0	14.0
m	4.0	5.0	8.0	9.0
r	2.0	2.0	3.0	3.0
c	0.5	0.5	0.5	1.0

The pitch circle diameter helps determine the correct external diameter of the sprocket with an attached chain in new condition.

Pitch circle diameter:

$$d_0 = \frac{p}{\sin(180^\circ/z)}$$

Max. diameter incl. chain:



$$D_{max} = d_0 + 2 \cdot (H-o)$$

Specific solutions

With specific variants, components and special types for special applications



For special components

- Special links are easily integrated as drivers or incremental transducers
- Parts from other manufacturers can be easily incorporated using special link plates or adapter pieces

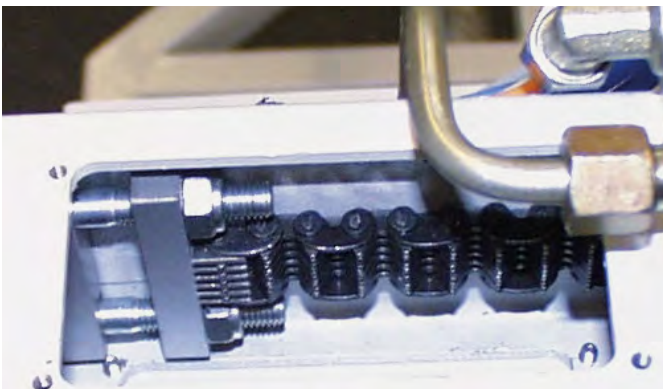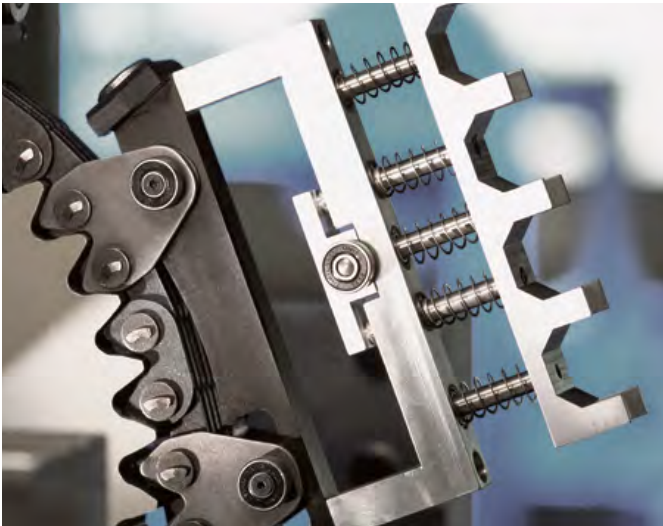

For special types


- Made from stainless steel
- With specially treated surfaces
- For clean room applications
- Special joints for inverted tooth chains without rigid backing

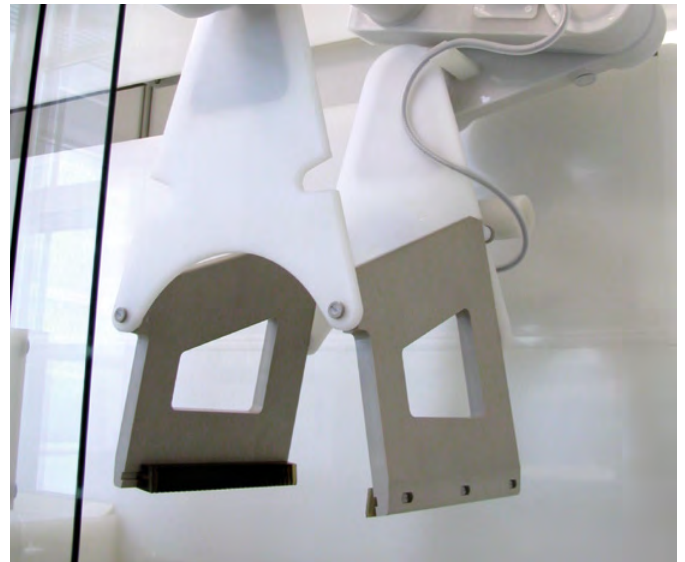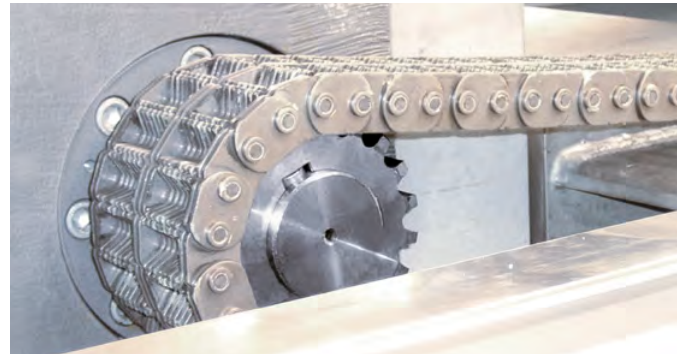

For special applications


Roller table drive applications

- ➔ Cost-efficient group drive
- ➔ Uniform synchronous running
- ➔ No backlash when reversing
- ➔ Quiet even at high speeds
- ➔ Good meshing conditions minimize wear

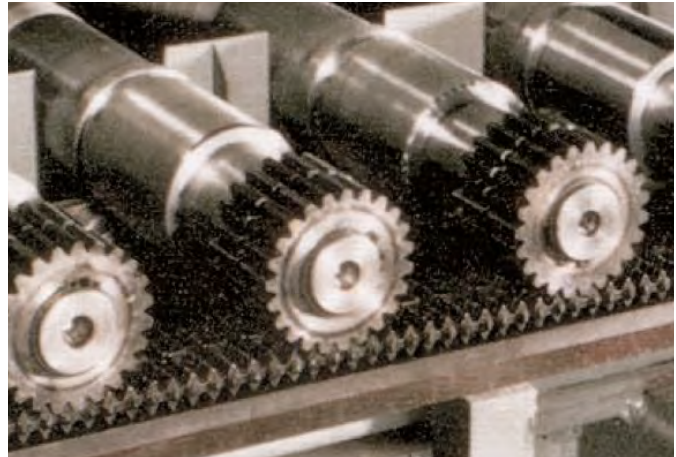

Gear rim applications

- ➔ More cost-efficient than a milled gear rim
- ➔ Suitable for large transmission ratios
- ➔ Full circle rotary motion or swivel motion along an angle segment possible in reverse or continuously

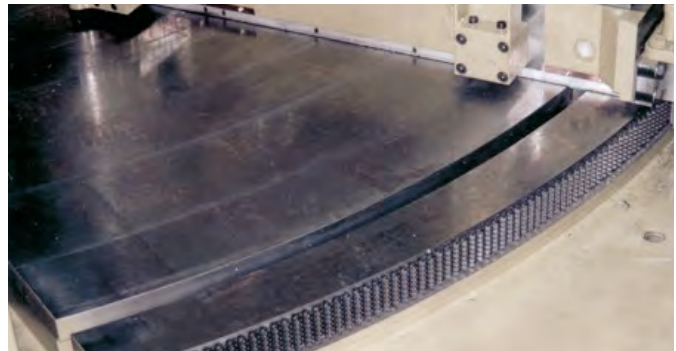

Gripper and robot drive applications

- ➔ Precise synchronized motion
- ➔ High load capacity even at narrow widths
- ➔ Optimum meshing depth on the tothing provides a high degree of security against skipping



Flexible shaft coupling applications


- ➔ High elasticity
- ➔ Uncouples quickly by opening the lock or by axial movement while chain stays closed
- ➔ Angles can be shifted to 1° and shafts can be shifted radially to 2% of the pitch



For special designs – when the ordinary is no longer sufficient

CC compact inverted tooth chains

- Chain links made from solid link plate blocks of maximum durability
- Sprockets with involute toothing in special versions
- Intended for slow runners with the highest possible power density
- Available in many sizes and models from 3/8" to 2 1/2" pitch, in special pitches up to 5"
- Also available with HPC pivot pins or round bolts—chains either have rigid backing or can be bent over both sides

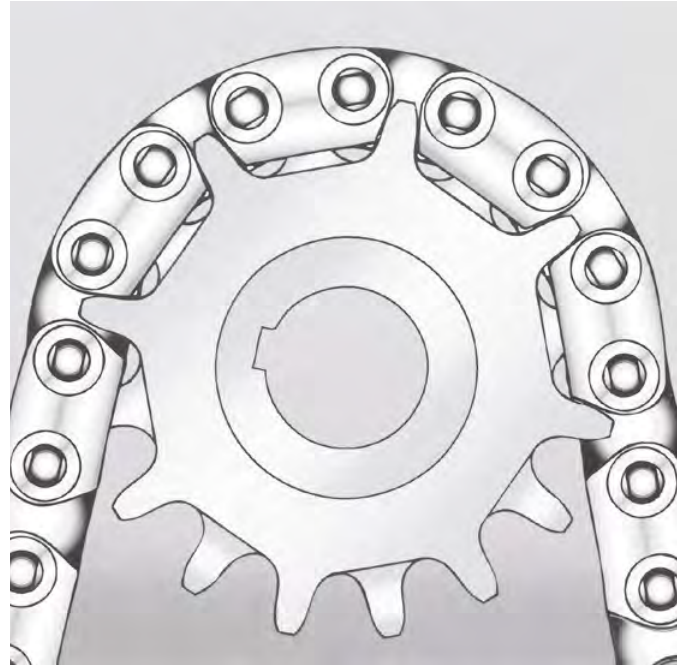

Tow chains

- Able to transfer heavy tensile loads while small in size
- Product carriers can be coupled by integrated sleeves or workpiece support using integrated bolts
- Particularly low height when installed in horizontal position
- Unmeshed cover link plates can provide screening



Pusher tooth chains

- Thrusts transmitted via link plate contact surface
- Involute toothing creates ideal meshing conditions on the sprocket
- For especially quiet stroke drives




For optimally configured special applications

Special inverted tooth chains in special pitches

Combine inverted tooth chain components or specific product advantages to customized solutions, e.g.:

- Low-wear rolling pivot joint to increase velocity
- Compact link plate construction to maximize power transmission
- Involute toothing on sprockets for extremely quiet running

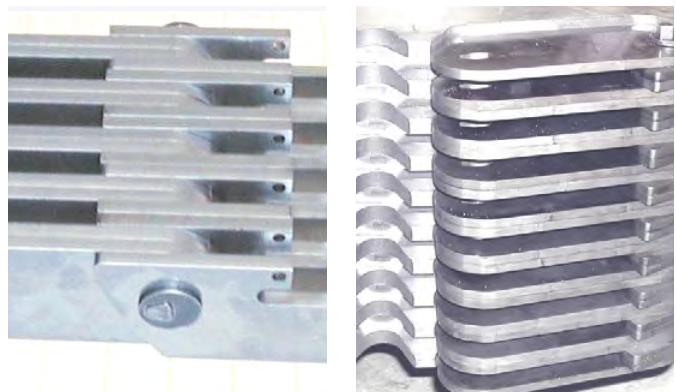

Special link plate forms optimized for the application; complex geometries through cutting-edge manufacturing processes

Advantages of using Renold inverted tooth chain solutions over the alternatives...

... customer's own design



- Cost savings
- Development capacity freed up
- Comprehensive cross-sector expertise from nearly 100 years of development activities

... standard solutions based on roller chains


- Higher quality tooth meshing and quieter running
- Less elongation
- Increased permissible speed
- Less requirements regarding lubrication and maintenance

HDL inverted tooth chain drives

The first optimization: Inverted tooth chains type HDL

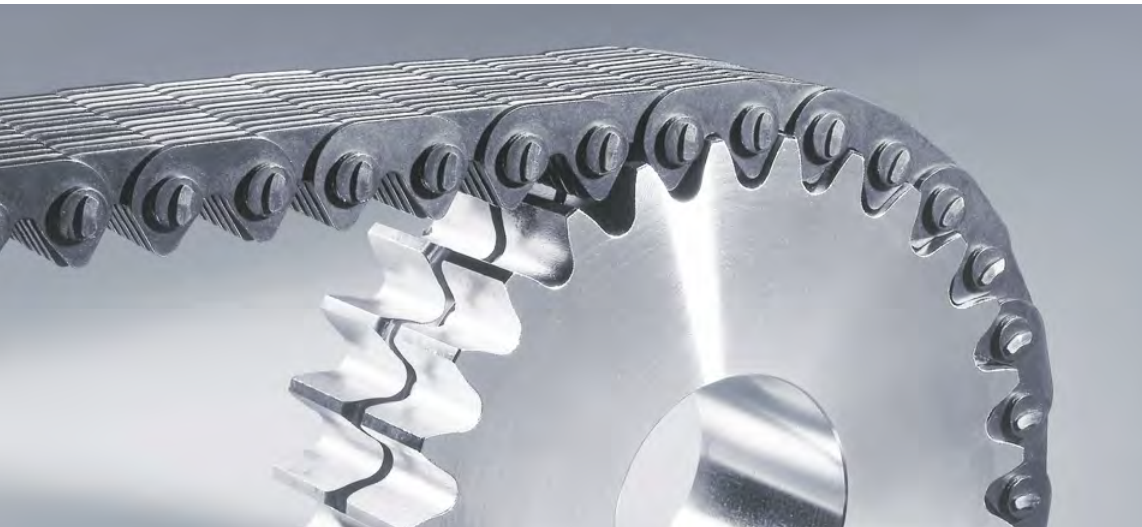

Improvements to the link plate form and joint kinematics compared to the KH type help transfer larger forces within smaller spaces and enable velocities of up to 40 m/s. An important milestone on the road towards the HPC type.




A tradition of quality

Our inverted tooth chains are always state-of-the-art. HDL inverted tooth chain drives have set numerous records and even today are considered an efficient solution for specific applications.


"Aerodynamic Research Volkswagen" – A trial vehicle equipped with a high-performance inverted tooth chain drive has set a number of world records.

KH inverted tooth chain drives

The forefather of drive chains with a rolling pivot joint



KH model inverted tooth chains set the stage for the triumph of inverted tooth chain drives in demanding applications. Available in pitches from 5/16" to 2" as a standard design in many older systems. Also available as a special 2 1/2" design for heavy-duty drives and slow running machines (e.g. KH 11350, 2 1/2" x 350 mm). Please get in touch with us if you would like more information.

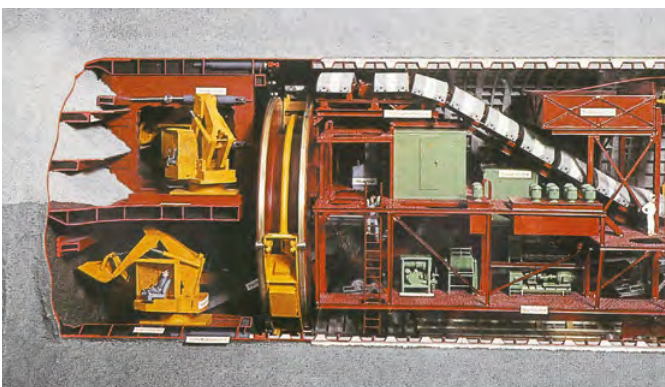


A tradition of quality

Our inverted tooth chains have always been at the front of the pack when it comes to moving large objects. Even today, KH inverted tooth chains are still used in special applications.

During the construction of the Elbe tunnel in Hamburg, KH inverted tooth chains were put to work as the gear rim for the tunneling machine.

HDL inverted tooth chains

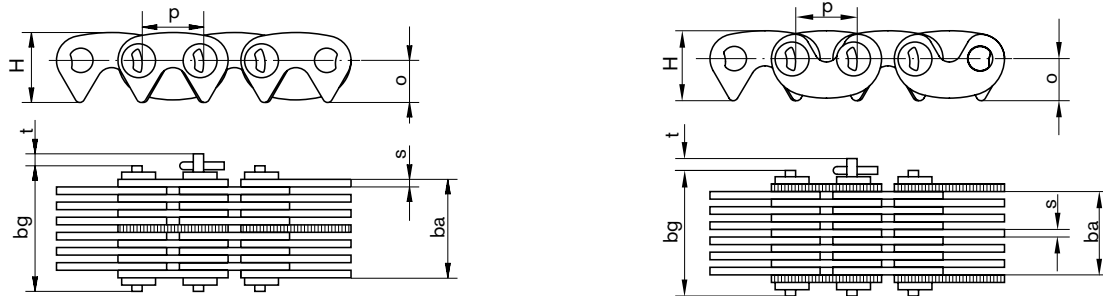


Pitch p	Designation no.	RZ	Nominal width b_n	Working width b_s	Total width b_g	Design breaking load	Weight [kg/m]	Sprocket width b	H	o	s	t				
3/8" = 9.525 mm	HDL 015 A	10	15	12.5	19.9	14.5	0.9	11.5	10.9	6.7	1.5	2.0				
	HDL 020 A	13	20	17.2	24.5	17.7	1.1	16.0								
	HDL 025	17	25	26.6	30.8	27.4	1.4	30.0								
	HDL 030	21	30	32.9	37.1	33.9	1.7	35.0								
	HDL 040	25	40	39.1	43.3	40.3	2.0	45.0								
	HDL 050	33	50	51.6	55.8	53.2	2.6	55.0								
	HDL 065	41	65	64.2	68.4	66.2	3.3	70.0								
	HDL 315 A	10	15	12.5	21.3	20.2	1.1	11.5					14.5	8.7	1.5	2.5
	HDL 320 A	13	20	17.2	25.9	24.7	1.4	16.0								
	HDL 325	17	25	26.6	32.2	38.2	1.8	30.0								
HDL 330	21	30	32.9	38.5	47.3	2.2	35.0									
HDL 340	25	40	39.1	44.7	56.3	2.6	45.0									
HDL 350	33	50	51.6	57.2	74.3	3.4	55.0									
HDL 365	41	65	64.2	69.8	92.3	4.3	70.0									
HDL 375	49	75	76.7	82.3	110.3	5.1	80.0									
HDL 3100	65	100	101.7	107.3	146.4	6.7	105.0									
3/4" = 19.05 mm	HDL 530 A	15	30	27.0	38.2	59.6	3.3	26.0	21.0	10.7	2.0	3.5				
	HDL 535	17	35	35.4	42.4	78.0	3.7	40.0								
	HDL 540	21	40	43.7	50.7	96.3	4.5	50.0								
	HDL 550	25	50	52.0	59.0	114.7	5.4	55.0								
	HDL 565	33	65	68.6	75.6	151.4	7.1	75.0								
	HDL 585	41	85	85.3	92.3	188.1	8.9	90.0								
	HDL 5100	49	100	101.9	108.9	224.9	10.6	105.0								
	HDL 5125	61	125	126.9	133.9	279.9	13.2	130.0								
	HDL 5150	73	150	151.8	158.8	335.0	15.8	155.0								
	HDL 5200	97	200	201.8	208.8	445.2	20.9	205.0								
1" = 25.4 mm	HDL 640	13	40	40.2	48.2	112.1	5.6	45.0	27.7	14.0	3.0	6.0				
	HDL 650	17	50	52.6	60.6	146.6	7.3	55.0								
	HDL 665	21	65	65.0	73.0	181.1	9.0	70.0								
	HDL 675	25	75	77.4	85.4	215.6	10.7	80.0								
	HDL 6100	33	100	102.1	110.1	284.7	14.1	105.0								
	HDL 6125	41	125	126.9	134.9	353.7	17.5	130.0								
	HDL 6150	49	150	151.7	159.7	422.7	21.0	155.0								
	HDL 6200	65	200	201.2	209.2	560.7	27.8	205.0								

Dimensions in mm – Design breaking load in kN – RZ (Number of rows) = number of all link plates per joint – Other pitches and widths on request.

- HDL inverted tooth chains are delivered open and with a split pin lock if not specified otherwise.
- Revolving chains require an even number of links. Chains with an uneven number of links could not be closed.
- Uneven numbers of links are permitted only if the ends of the chain are connected to external parts.

HDL inverted tooth sprockets

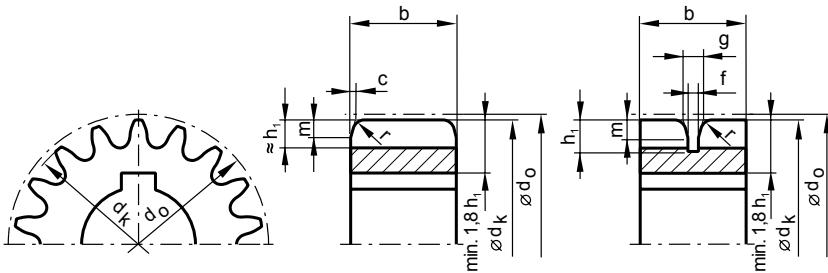

Minimum number of teeth:
The theoretical minimum is 17,
but in practice, it should not be
below 23 teeth.

Tip diameter d_k

Number of teeth z	3/8"	1/2"	3/4"	1"
17	48.1	63.9	100.7	134.3
18	51.2	68.0	106.9	142.6
19	54.3	72.2	113.1	150.8
20	57.4	76.3	119.3	159.1
21	60.5	80.4	125.5	167.3
22	63.5	84.6	131.6	175.5
23	66.6	88.7	137.8	183.7
24	69.7	92.8	143.9	191.9
25	72.8	96.9	150.0	200.1
26	75.8	101.0	156.2	208.3
27	78.9	105.0	162.3	216.4
28	82.0	109.1	168.4	224.6
29	85.0	113.2	174.5	232.7
30	88.1	117.3	180.7	240.9
31	91.2	121.4	186.8	249.0
33	97.3	129.5	199.0	265.3
35	103.4	137.7	211.2	281.6
37	109.5	145.8	223.4	297.9
39	115.6	153.9	235.6	314.1
41	121.7	162.1	247.8	330.3
43	127.8	170.2	260.0	346.6
45	133.9	178.3	272.1	362.8
47	139.9	186.4	284.3	379.0
49	146.0	194.5	296.4	395.3
51	152.1	202.6	308.6	411.5
55	164.3	218.9	332.9	443.9
60	179.5	239.1	363.3	484.4
70	209.9	279.6	424.0	565.4
80	240.2	320.1	484.8	646.4
90	270.6	360.6	545.5	727.3
100	300.9	401.1	606.1	808.2
110	331.3	441.5	666.8	889.1
120	361.6	482.0	727.5	970.0
130	391.9	522.4	788.2	1050.9
140	422.3	562.8	848.8	1131.8
150	452.6	603.3	909.5	1212.6

Guideway and profile

Pitch p	3/8"	1/2"	3/4"	1"
g	4.0	4.0	5.0	8.0
f	3.0	3.0	4.0	6.0
h_1	6.0	7.0	12.0	15.0
m	4.0	5.0	8.0	10.0
r	2.0	2.0	3.0	3.0
c	0.5	0.5	0.5	1.0

The pitch circle diameter helps determine the correct external diameter of the sprocket with an attached chain in new condition.



Pitch circle diameter:

$$d_0 = \frac{p}{\sin(180^\circ/z)}$$

Max. diameter incl. chain:

$$D_{max} = d_0 + 2 \cdot (H-o)$$

KH inverted tooth chains

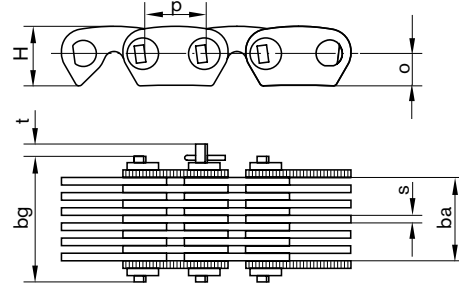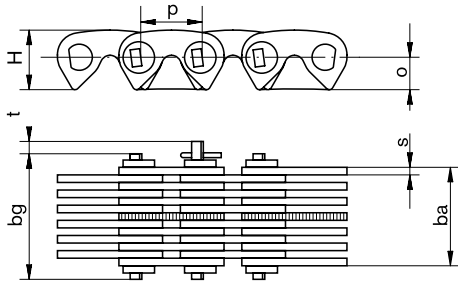


Pitch p	Designation no.	RZ	Nominal width b_n	Working width b_s	Total width b_g	Design breaking load	Weight [kg/m]	Sprocket width b	H	o	s	t
5/16" = 7.9375 mm	KH 2212 A	12	12	10.7	16.8	5.6	0.5	9.5	7.7	4.2	1.0	2.0
	KH 2215 A	14	15	12.8	18.9	6.6	0.6	11.5				
	KH 2220 A	18	20	17.0	23.2	8.6	0.7	15.5				
	KH 2225	25	25	26.6	30.6	12.7	0.9	30.0				
3/8" = 9.525 mm	KH 015 A	10	15	12.5	19.9	12.1	0.8	11.5	9.2	5.2	1.5	2.0
	KH 020 A	13	20	17.2	24.5	14.8	1.0	16.0				
	KH 025	17	25	26.6	30.8	22.9	1.1	30.0				
	KH 030	21	30	32.9	37.1	28.3	1.4	35.0				
	KH 040	25	40	39.1	43.3	33.7	1.7	45.0				
1/2" = 12.7 mm	KH 315 A	10	15	12.5	21.3	16.0	1.0	11.5	12.3	6.7	1.5	2.5
	KH 320 A	13	20	17.2	25.9	19.6	1.2	16.0				
	KH 325	17	25	26.6	32.2	30.3	1.4	30.0				
	KH 330	21	30	32.9	38.5	37.4	1.8	35.0				
	KH 335	25	35	39.1	44.7	44.6	2.1	40.0				
	KH 350	33	50	51.6	57.2	58.9	2.8	55.0				
5/8" = 15.875 mm	KH 425	13	25	27.0	32.8	39.7	1.9	30.0	15.4	8.4	2.0	3.0
	KH 435	17	35	35.4	41.2	52.0	2.5	40.0				
	KH 450	25	50	52.0	57.8	76.5	3.6	55.0				
	KH 465	33	65	68.6	74.4	100.9	4.8	70.0				
3/4" = 19.05 mm	KH 535	17	35	35.4	42.4	65.0	2.9	40.0	18.5	10.1	2.0	3.5
	KH 550	25	50	52.0	59.0	95.6	4.3	55.0				
	KH 565	33	65	68.6	75.6	126.2	5.7	75.0				
	KH 575	37	75	77.0	84.0	141.5	6.4	80.0				
1" = 25.4 mm	KH 650	17	50	52.6	60.6	126.4	5.9	55.0	24.6	13.1	3.0	4.0
	KH 665	21	65	65.0	73.0	156.1	7.3	70.0				
	KH 675	25	75	77.4	85.4	185.9	8.7	80.0				
	KH 6100	33	100	102.1	110.1	245.4	11.4	105.0				
1 1/2" = 38.1 mm	KH 865	21	65	65.2	77.2	232.0	10.8	75.0	36.9	20.1	3.0	6.0
	KH 875	25	75	77.6	89.6	276.2	12.9	85.0				
	KH 8100	33	100	102.5	114.5	364.6	17.0	110.0				
	KH 8150	49	150	152.1	164.1	541.4	25.2	160.0				
2" = 50.8 mm	KH 9100	25	100	104.5	117.5	478.1	22.6	110.0	49.2	26.8	4.0	7.0
	KH 9115	29	115	121.2	134.2	554.6	26.2	125.0				
	KH 9150	37	150	154.7	167.7	707.6	33.5	160.0				
	KH 9180	45	180	188.1	201.1	860.6	40.7	190.0				

Dimensions in mm – Design breaking load in kN – RZ (Number of rows) = number of all link plates per joint – Other pitches and widths on request.

- KH inverted tooth chains are delivered open and with a split pin lock if not specified otherwise.
- Uneven numbers of links are permitted for revolving chains. However, in this case the design breaking load will be reduced to approx. 80% of the value in the table.
- Uneven numbers of links are also permitted if the ends of the chain are connected to external parts.

KH inverted tooth sprockets

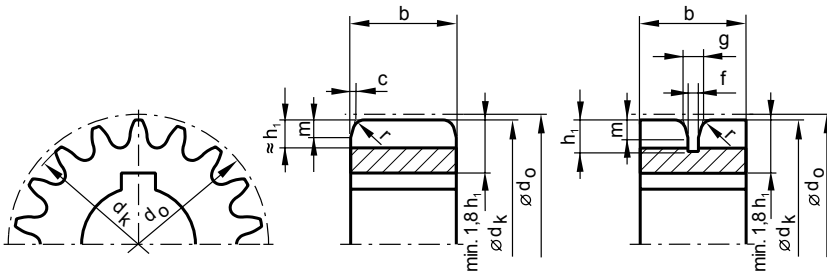

Minimum number of teeth:
 5/16" to 3/4" = 13 teeth
 from 1" = 15 teeth

Tip diameter dk								
Number of teeth z	5/16"	3/8"	1/2"	5/8"	3/4"	1"	1 1/2"	2"
13	31.9	38.6	51.5	64.4	77.2	-	-	-
14	34.5	41.7	55.6	69.5	83.4	-	-	-
15	37.1	44.8	59.7	74.6	89.6	119.4	179.2	238.9
16	39.7	47.9	63.8	79.8	95.7	127.6	191.5	255.4
17	42.3	51.0	67.9	84.9	101.9	135.8	203.8	271.7
18	44.9	54.0	72.0	90.0	108.0	144.0	216.0	288.1
19	47.4	57.1	76.1	95.1	114.1	152.2	228.3	304.4
20	50.0	60.1	80.1	100.2	120.2	160.3	240.5	320.7
21	52.5	63.2	84.2	105.3	126.3	168.5	252.7	337.0
22	55.1	66.3	88.3	110.4	132.4	176.6	264.9	353.3
23	57.7	69.3	92.3	115.4	138.5	184.7	277.1	369.5
24	60.2	72.3	96.4	120.5	144.6	192.9	289.3	385.8
25	62.8	75.4	100.5	125.6	150.7	201.0	301.5	402.1
26	65.3	78.4	104.5	130.7	156.8	209.1	313.7	418.3
27	67.8	81.5	108.6	135.8	162.9	217.3	325.9	434.6
28	70.4	84.5	112.7	140.8	169.0	225.4	338.1	450.8
29	72.9	87.6	116.7	145.9	175.1	233.5	350.3	467.0
30	75.5	90.6	120.8	151.0	181.2	241.6	362.4	483.3
31	78.0	93.7	124.8	156.1	187.3	249.7	374.6	499.5
33	83.1	99.8	133.0	166.2	199.5	266.0	399.0	532.0
35	88.2	105.8	141.1	176.3	211.6	282.2	423.3	564.4
37	93.2	111.9	149.2	186.5	223.8	298.4	447.6	596.8
39	98.3	118.0	157.3	196.6	235.9	314.6	471.9	629.2
41	103.4	124.1	165.4	206.7	248.1	330.8	496.2	661.6
43	108.4	130.1	173.5	216.9	260.2	347.0	520.5	694.0
45	113.5	136.2	181.6	227.0	272.4	363.2	544.8	726.4
47	118.6	142.3	189.7	237.1	284.5	379.4	569.1	758.8
49	123.7	148.4	197.8	247.2	296.7	395.6	593.4	791.2
51	128.7	154.5	205.9	257.3	308.8	411.8	617.7	823.6
55	138.8	166.6	222.1	277.6	333.1	444.1	666.2	888.3
60	151.5	181.7	242.3	302.9	363.4	484.6	726.9	969.3
70	176.8	212.1	282.7	353.4	424.1	565.5	848.3	1131.1
80	202.1	242.4	323.2	404.0	484.8	646.4	969.7	1292.9
90	227.4	272.8	363.6	454.6	545.5	727.3	1091.0	1454.7
100	252.7	303.1	404.1	505.1	606.1	808.2	1212.3	1616.4
110	277.9	333.5	444.5	555.6	666.8	889.0	1333.6	1778.1
120	303.2	363.7	484.9	606.2	727.4	969.9	1454.9	1939.9
130	328.5	394.3	525.4	656.8	788.1	1050.8	1576.2	2101.7
140	353.7	424.6	565.8	707.3	848.8	1131.7	1697.6	2263.4
150	379.0	454.7	606.2	757.8	909.4	1212.5	1818.8	2425.1

Guideway and profile				
Pitch p	5/16"	3/8"	1/2"	5/8"
g	3.5	4.0	4.0	5.0
f	2.5	3.0	3.0	4.0
h ₁	5.0	6.5	8.0	10.0
m	3.0	4.0	5.0	6.0
r	2.0	2.0	2.0	3.0
c	0.5	0.5	0.5	0.5

Guideway and profile				
Pitch p	3/4"	1"	1 1/2"	2"
g	5.0	8.0	9.0	11.0
f	4.0	6.0	6.0	8.0
h ₁	12.0	16.0	23.0	31.0
m	8.0	10.0	16.0	20.0
r	3.0	3.0	4.0	4.0
c	0.5	1.0	1.5	1.5

The pitch circle diameter helps determine the correct external diameter of the sprocket with an attached chain in new condition.

Pitch circle diameter:

$$d_0 = \frac{p}{\sin(180^\circ/z)}$$

Max. diameter incl. chain:

$$D_{max} = d_0 + 2 \cdot (H - o)$$

Calculate, order, assemble

Calculating the length

The required length of an inverted tooth chain in links to fit a given center distance can be calculated with the formula provided.

Shaft center distance

With the exception of the KH type, continuous chains can only be closed if they have an even number of links. After selecting the number of links based on the calculated length, the final center distance can be determined.

The formulas shown apply only to drives with two sprockets which comply with the recommended wrap angle and transmission ratios below 6.

We are more than happy to perform the calculations for you, especially for drives involving more than two sprockets. It goes without saying that other commercially available computing programs can also be used.

Calculating length:

$$X = 2 \cdot \frac{a}{p} + Z \quad ; \text{ for } i = 1$$

$$X = 2 \cdot \frac{a}{p} + \frac{Z_1 + Z_2}{2} + \left(\frac{Z_2 - Z_1}{2 \cdot \pi} \right)^2 \cdot \frac{p}{a}$$

Shaft center distance:

$$a = \frac{p}{2} \cdot (X - Z) \quad ; \text{ for } i = 1$$


$$a = \frac{p}{4} \cdot \left[X - \frac{Z_1 + Z_2}{2} + \sqrt{\left(X - \frac{Z_1 + Z_2}{2} \right)^2 - 8 \cdot \left(\frac{Z_2 - Z_1}{2 \cdot \pi} \right)^2} \right]$$

X	= number of links	Z ₁	= number of teeth on the small sprocket
a	= shaft center distance in mm	Z ₂	= number of teeth on the large sprocket
p	= pitch in mm		
Z	= number of teeth Z = Z ₁ = Z ₂ for i = 1		
i	= transmission ratio		

Sales designations for inverted tooth chain drives

1. Type marketing	2. Pitch	3. Nominal width in mm	4. Version marking (optional)
HPC	22 = 5/16"		A = External guide
BIZ	0 = 3/8"		Z = Version with reinforcement plates
HDL	3 = 1/2"		D = Double link plates
KH	4 = 5/8"		
	5 = 3/4"		
	6 = 1"		
	8 = 1 1/2"		
	9 = 2"		
	11 = 2 1/2"		

The inverted tooth chains shown in the tables are a mere selection from our product range. Please get in touch with us if you need a width or pitch not listed here.

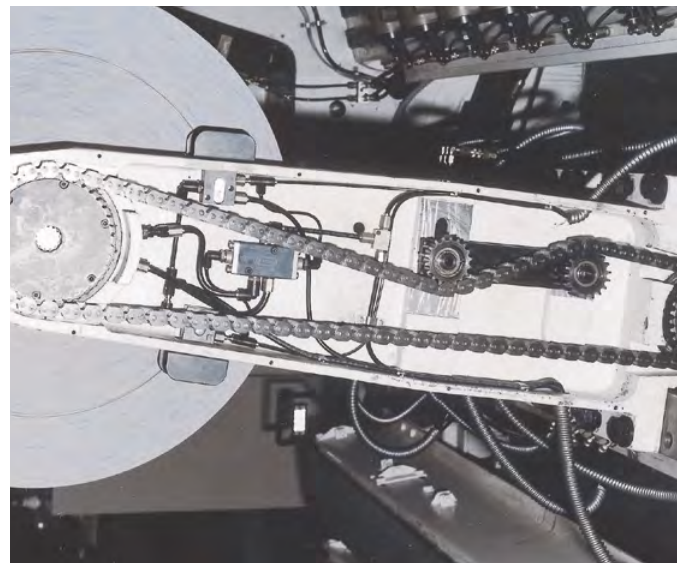


What to observe

Sprocket wrap angle


For a proper function of inverted tooth chain drives, a minimum sprocket wrap angle of $\beta = 120^\circ$ must be observed for up to 27 teeth. If more teeth are used, the wrap angle must be at least $\beta = 90^\circ$. The minimum wrap angle of the idler sprocket should be at least: $\beta = 360^\circ/Z$ (Z = number of teeth). Please get in touch with us if you have other operating conditions or require tangential meshing.

Inverted tooth chain tensioning and sag

Pre-tensioning of inverted tooth chains generally is not necessary. The chain has been properly installed when the return strand sags 1% of the distance between the shafts while the loaded chain is running.

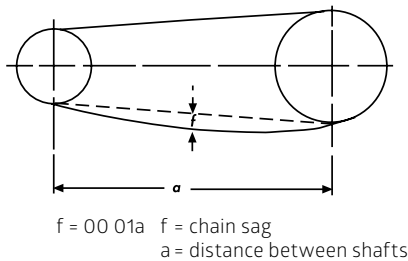


Excess chain slack must be corrected by spacing the shafts farther apart or by using an idler sprocket. In the return strand, idlers are arranged working outwards; in Biflex inverted tooth chains, the wheels also work from outwards to inwards.

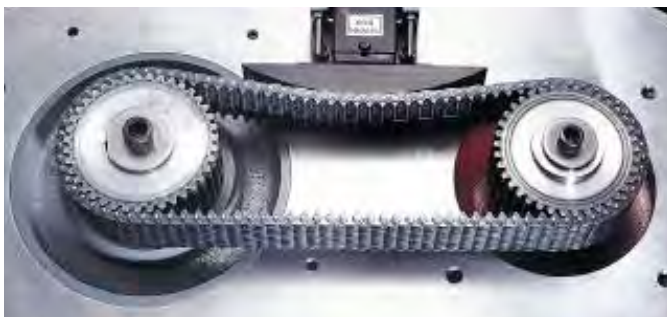

It is also possible to use sliding rails to tension the inverted tooth chains on the backside. The bending radius for HPC inverted tooth chains should be at least 30 times the pitch used. A factor of 20 is sufficient for all other types of inverted tooth chains.

Sprocket assembly

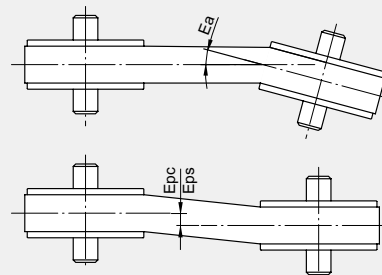

The sprockets must be parallel to each other.

Permissible error $Ea \leq 1^\circ$

The sprockets must be aligned correctly.

Permissible error

- ➔ With center guides:
 $Epc \leq$ guideway width f_{max} – link plate thickness s_{min}
- ➔ With side guides:
 $Eps \leq$ working width b_{Amin} – sprocket width b_{max}

The axial play on the sprockets must be minimized.

Adjusting and re-tensioning

If pre-tensioning is needed to prevent backlash on reversible drives, the longest strand does not sag when properly adjusted. However, it can be forced manually to up to $\pm 2\%$ of the distance between the shafts. After initial start-up, the chain experiences a first elongation phase. Since this process is based on loads, the chain length, speed, and other factors, it is impossible to predict how long this initial elongation will last. It is quite possible that re-tensioning will be necessary after a short running-in period.

Later re-tensioning can be performed as needed (elongation due to operating is substantially less). Shorter distances between shafts and consistent direction of loaded travel eliminate the need for re-tensioning. Applications which do not feature the option of re-tensioning or lack sufficient tensioning space can also use inverted tooth chains elongated at the factory. This is a special process which preempts initial elongation before the chain is delivered.

Applying, closing, shortening and lengthening

Assembling inverted tooth chains

Inverted tooth chains are normally delivered open and can be closed with the accompanying split pin or rivet pin lock after installation. If needed, inverted tooth chains can be supplied endless riveted; in such cases, ensure that the chain can be laid on the sprockets without any problems before assembly begins.

Continuous drives require an even number of links – otherwise the ends of the inverted tooth chain will not meet.

An uneven number of links is permitted only on inverted tooth chains in which the ends of the chain are connected to external parts such as adapter pieces or tension locks.

Please do not deviate from the instructions given below – they are the prerequisites for the chain drive's trouble-free operation, quiet running, and long service life.



Adapter pieces at use of uneven number of links

Applying and closing inverted tooth chains with two-pin system


The inverted tooth chain is laid around the sprockets so that both ends can meet in the toothing and mesh with each other if possible. Axle and rolling pivots are consecutively fed into the link plate bore. Important: an incorrect pin arrangement can disturb quiet running and can even cause the chain to break under certain circumstances.

The rivet washer is then applied, the cotter pin is inserted and closed; rivet closures are riveted manually. The tightness of the rivet washer is an intentional security measure and must not be tampered with by modifying the pin end. Always remember to arrange the axle pins and pivot pins properly.

Shortening and lengthening chains/ Note the correct pin assembly




HPC



HDL



KH



Biflex

- Open the split pin to open the inverted tooth chain
- Remove the rivet washer and pull the pin from the joint
- Grind the rivet head off in case of riveted lock
- To shorten, proceed in the same manner on the other end of the section to be removed
- Join the ends and close the inverted tooth chain
- It is important to pay attention to the correct number and orientation of the link plates
- To lengthen, join the ends of the section to be inserted with the ends of the inverted tooth chain. Close them as described above with the accompanying split pins or rivet pin locks

The right lubrication

A well-lubricated inverted tooth chain


A dry-running chain can experience a much shorter service life. The oil film placed on the chain at the factory is for corrosion protection only and does not act as a lubricant. The type of lubrication is based primarily on the circumferential speed of the inverted tooth chain and can be determined using the diagram below. However, this system does not adequately cover drive cases with an extremely wide range of speed profiles or which operate under harsh ambient conditions. When in doubt, please get in touch with us!



Lubricants

Lubricants in use should generally have a viscosity of at least 220 mm²/s (cSt) according to DIN 51562-01. We also especially recommend for open inverted tooth chain drives the use of sprays such as VISCOGEN KL 23 or comparable. Of course, conventional grease lubrication is also an option although its low creep characteristics may not be sufficient for the required joint lubrication. When in doubt, just let us know – we will check the lubricant you have selected any time. We are also happy to recommend lubricants for special applications – in the food industry or for high-temperature applications, for instance.

Lubrication dependent on inverted tooth chain velocity (v in m/s)

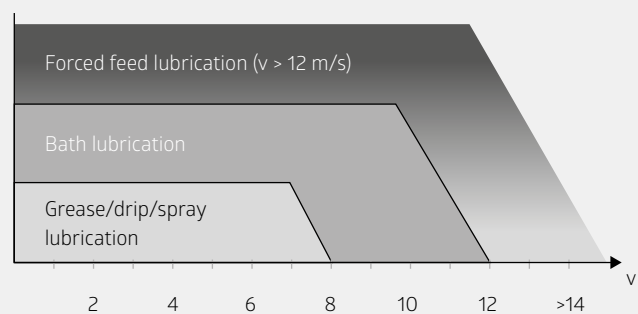

Grease, drip, and spray lubrication

Lubrications with greases capable of flowing, oils with good adhesive and creep characteristics, or lubricants thinned with volatile components. Lubricate regularly according to speed.

Bath lubrication

Lubrication by oil bath immersion. The inverted tooth chain should be set so that its joints are immersed at the deepest point when the chain is stopped.

Automatic lubrication device

Lubrication of the inverted tooth chain without oil-tight housing. Minimal amount of lubricant can be applied thanks to adjustable dosage. Lubricant is applied to the chain teeth using tubes and brushes. Up to one year of maintenance-free operation.

Forced feed lubrication

This requires closed, oil-tight housings. The inverted tooth chain lies above the oil basin and the spray nozzles are directed at the toothed side.

Innovative and accurate

Customer service, engineering, design –
Advantages you can dig your teeth into


Using the latest technical methods and field-specific knowledge needed for the customer's tasks, we calculate and develop the most suitable configuration.

Inverted tooth chains and sprockets are perfectly adapted to each other.



Inverted tooth conveyor chains

We are not only driving, we are also conveying

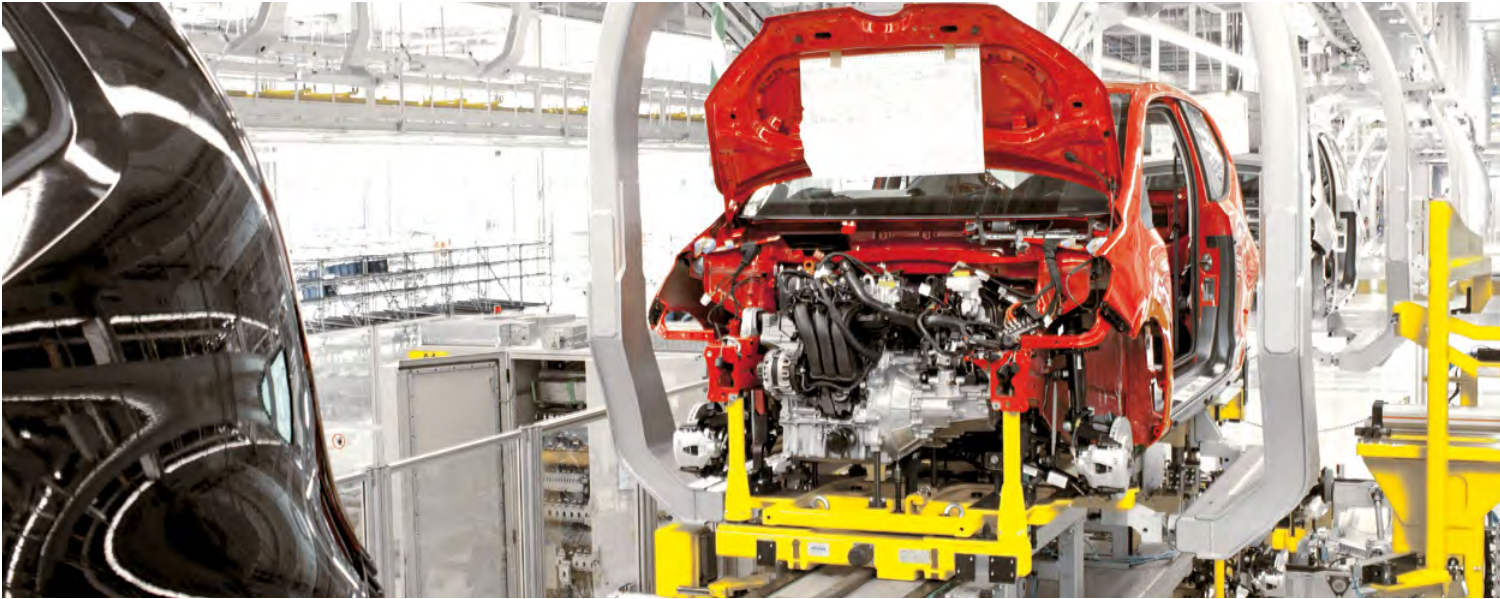

Whether for heavy-duty, robust operation, or to convey parts with small or large dimensions, processed or unprocessed workpieces, or even fragile items: Renold inverted tooth conveyor chains guarantees trouble-free operation of your conveying system.

These factors are met through the following pre-requisites

- ➔ Low-friction rolling pivot joint made from case hardened steel and exhibiting a high degree of efficiency, resistance to wear, and durability
- ➔ Inverted tooth chain link plates with FE-optimized outlines made from high resistance heat-treated steel
- ➔ Sprockets featuring hardened involute toothing for smooth, impact-free meshing and a long service life

When compared to other conveyor systems, the advantages shine through

- ➔ Optimum use of space due to maximum versatility as a modular system
- ➔ The proverbial quiet running; in a word: silent chain
- ➔ Extremely long service life and availability
- ➔ High temperature resistance
- ➔ Highly robust and durable



